


SUMMIT
MACHINE TOOL LLC

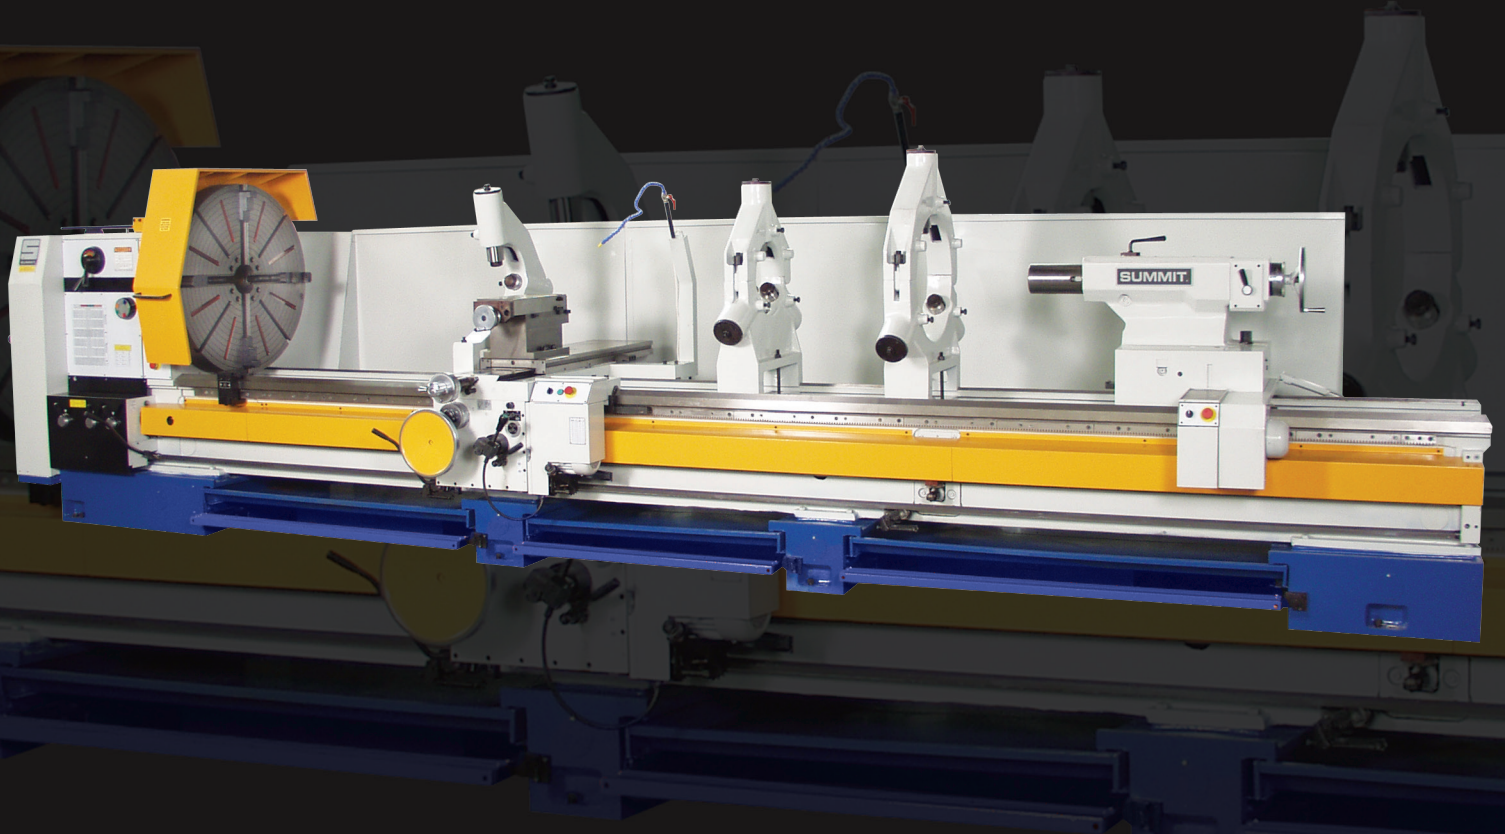

HEAVY DUTY BIG SWING LATHES

35" - 42" - 52" SWINGS
6.1" SPINDLE BORE

DIMENSIONS AND SPECIFICATIONS

35" - 42" - 52" HEAVY DUTY BIG SWING LATHES



SPECIFICATIONS	35"	42"	52"	35" VS	42" VS	52" VS
CAPACITIES						
Swing Over Bed	35" / 890mm	42.9" / 1090mm	51.9" / 1,320mm	35" / 890mm	42.9" / 1090mm	51.9" / 1,320mm
Swing Over Cross Slide	1.96" / 500mm	27.5" / 700mm	37.4" / 950mm	1.96" / 500mm	27.5" / 700mm	37.4" / 950mm
Swing In Gap	41.7" / 1,060mm	49.6" / 1,260mm	59.4" / 1,510mm	41.7" / 1,060mm	49.6" / 1,260mm	59.4" / 1,510mm
Width of Bed	27.5" / 700mm					
HEADSTOCK						
Spindle Bore	6.1" / 155mm					
Spindle Nose	A2 - 15					
Spindle Speeds - number	24			Infinitely Variable (4 ranges)		
Spindle Speeds - range	6.3 - 1250			2.6 - 700		
FEEDS & THREADS						
Feeds - number	160					
Longitudinal Feeds - range	.0013" - 1.53" IPR / .032 - 38.99mm/rev					
Cross Feeds - range	.0006" - .7657" IPR / .016 - 19.45 mm/rev					
Threads - number	80					
Inch Threads - range	1/16 - 60					
Metric Threads - range	.5 - 480					
CARRIAGE & APRON						
Cross Slide Travel	19.6" / 500mm	26.9" / 685mm	26.9" / 685mm	19.6" / 500mm	26.9" / 685mm	26.9" / 685mm
Compound Travel	10.6" / 270mm					
TAILSTOCK						
Tailstock Quill Diameter	4.9" / 125mm					
Tailstock Quill Taper	#6 MT					
Tailstock Quill Travel	9.8" / 250mm					
Horsepower	30 HP / 22 kw			40 HP / 30 kw		
WEIGHT						
60" / 1,500mm	15,400 lbs. / 6,990kg	17,100 lbs. / 7,740kg	18,200 lbs. / 8,240kg	15,400 lbs. / 6,990kg	17,100 lbs. / 7,740kg	18,200 lbs. / 8,240kg
120" / 3,000mm	19,100 lbs. / 8,650kg	20,800 lbs. / 9,450kg	21,800 lbs. / 9,900kg	19,100 lbs. / 8,650kg	20,800 lbs. / 9,450kg	21,800 lbs. / 9,900kg
160" / 4,000mm	21,500 lbs. / 9,750kg	23,300 lbs. / 10,550kg	24,200 lbs. / 11,000kg	21,500 lbs. / 9,750kg	23,300 lbs. / 10,550kg	24,200 lbs. / 11,000kg
200" / 5,000mm	25,000 lbs. / 11,350kg	26,800 lbs. / 12,150kg	27,800 lbs. / 12,600kg	25,000 lbs. / 11,350kg	26,800 lbs. / 12,150kg	27,800 lbs. / 12,600kg
240" / 6,000mm	27,700 lbs. / 12,500kg	29,200 lbs. / 13,250kg	30,200 lbs. / 13,700kg	27,700 lbs. / 12,500kg	29,200 lbs. / 13,250kg	30,200 lbs. / 13,700kg

INCLUDED ACCESSORIES

- Steady rest
- Follow rest
- Thread dial
- Coolant system
- Taper attachment
- 3 jaw chuck
- Carriage stop
- Work light
- Full length splash guard
- Service wrenches and spinners

OPTIONS

- Dorian super quick change tool post with holders
- Fagor 2 axis digital readout installed

STANDARD FEATURES

- Big 6 1/8" thru hole
- Inch/metric threads with single switch lever
- Cuts most inch/metric threads without change gears
- Hardened and ground bedways
- Forced lubrication to the headstock, carriage and bedways
- Mechanical disc clutch
- Removable gap
- Precision (3) bearing spindle
- Crossfeed and threading safety interlock
- Feed reversing at the apron
- 6-way rapid traverse
- Single lever control for feeds and rapids
- Powered tailstock movement
- Power compoint

ELECTRICS

- 220/440/680

WARRANTY: A copy of Summit Machine Tool LLC's standard written warranty is attached to each Summit Machine. Call or write to Summit for a copy or for further information concerning Summit's standard warranty. All purchases are subject to Summit's standard written warranty. Specifications are subject to change without notice.

POINT OF OPERATION GUARDING is the responsibility of the end user. For information contact your local OSHA office.

SUMMIT MACHINE TOOL LLC

518 N Indiana Ave • Oklahoma City, OK 73106

MAIN 405.235.2075

FAX 405.232.5169



FOR MORE INFORMATION CALL 1-800-654-3262

WWW.SUMMITMACHINETOOL.COM